

Administration Extension Example

AEE - Introduction	1
AEE - Java API Workspace preparation	1
AEE - Creating project plugin	1
AEE - Deployment to Installed Polarion	1
AEE - Execution from Workspace	1
AEE - Configuration	1

See also main SDK page.

AEE - Introduction

In this example we will show how to create custom administration page.

what will be shown in the example

1. how to create custom administration page
2. how to register custom administration page to Polarion

AEE - Java API Workspace preparation

See section *Workspace preparation*

AEE - Creating project plugin

The best way is to import provided example, which contains all dependencies you need for custom plugin creation

AEE - Import of the example

Info: You must ensure that your plugin is compiled against your Polarion version. This example contains precompiled jar plugin. You can remove it before you start developing your plugin based on this example. The Eclipse ensure that new jar plugin will be created against your source code and Polarion version.

To import this example to workspace, do these steps:

1. Select **File > Import...**
2. In the dialog that appears, select **Existing Project into Workspace** in **General** section and press **Next** button.
3. By pressing **Browse..** button, select the directory of examples (mostly in `C:\Polarion\polarionSDKexamples`). Submit it.
4. Select `com.polarion.example.administration` and press **Finish**.

AEE - Deployment to Installed Polarion

See section *Deployment to Installed Polarion*

AEE - Execution from Workspace

See section *Execution from Workspace*

AEE - Configuration

Custom administration pages are registered via `hivemodule.xml` to contribution with id `com.polarion.xray.webui.administrationPageExtenders`.

Extender attributes: `id` (required), `name`, `iconUrl`, `pageUrl`, `parentNodeId`, `parentNodeName`, `parentNodeIconUrl`, `projectScope` (Boolean), `projectGroupScope` (Boolean), `repositoryScope` (Boolean)

```
<?xml version="1.0" encoding="UTF-8"?>
<module id="com.polarion.example.administration" version="1.0.0">
<contribution configuration-id="com.polarion.xray.webui.administrationPageExtenders">
  <extender id="administrationExample"
    parentNodeId="administrationExampleFolder"
    name="Page" parentNodeName="Example"
    parentNodeIconUrl="/polarion/icons/default/topicIcons/Tools_157-wrench.png"
    iconUrl="/polarion/icons/default/topicIconsSmall/Tools_158-wrench-2.png"
    pageUrl="/polarion/administrationExample/administration.jsp?scope=$scope$"
    projectScope="true" projectGroupScope="true" repositoryScope="true"/>
</contribution>
</module>
```

Requirements

Development Environments

- [Eclipse IDE for Enterprise Java Developers](#) or any other Eclipse IDE with The Eclipse Plug-in Development Environment. (Go to Help > Install New Software... > Install Eclipse Plug-in Development Environment > Restart Eclipse)
- [Eclipse Temurin™ 17 \(LTS\) by Adoptium](#) for building and running your code.

Workspace Preparation

To start developing a Polarion Java API plug-in, you first need to perform following steps:

1. Start Eclipse, then select **Window > Preferences...**
2. In the dialog that appears, select **Plug-In Development > Target Platform**.
3. Click the **Add** button on the right.
4. Keep the **Nothing: Start with an empty target definition** option selected and click **Next**.

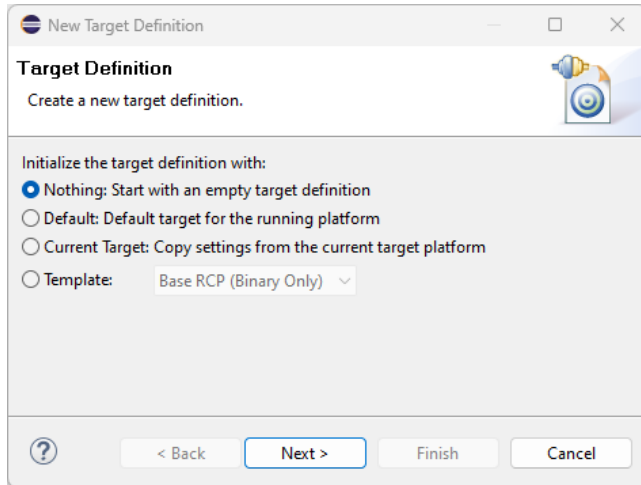


Figure WP-1: Starting with an Empty Target Definition

5. Enter a **Name** and click **Add**.
6. Select **Directory** and click **Next**.
7. Click **Browse** and select the C:\Polarion\polarion folder (*Windows*) or /opt/polarion/polarion (*Linux*). (One level above the *plugins* folder.)
8. Click **Next**.

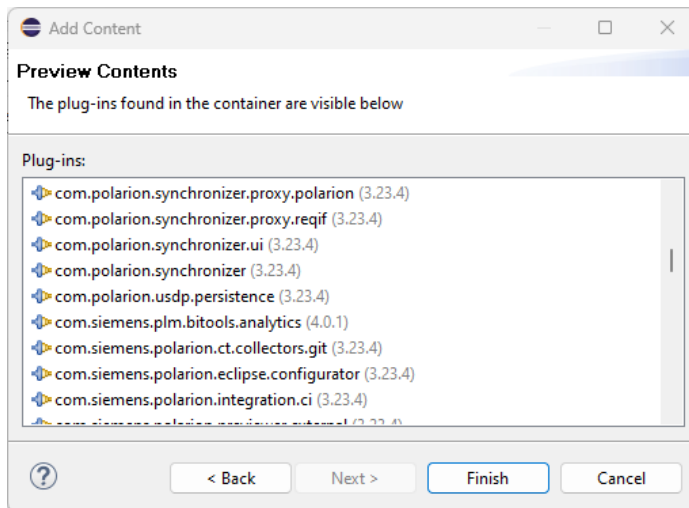


Figure WP-2: Currently Installed Polarion Plug-ins

9. A list of currently installed Polarion plug-ins appears. Click **Finish**.

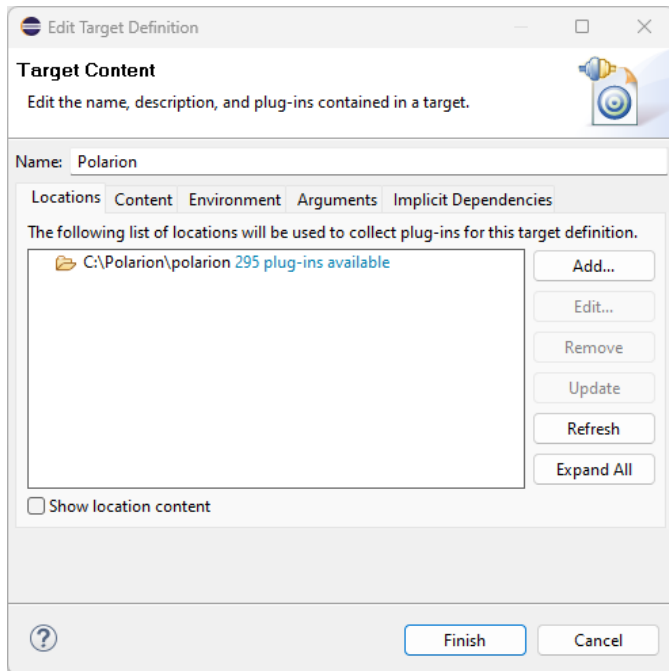


Figure WP-3: Confirm the Selected Path

10. The selected path and the number of discovered plug-ins appear. Confirm that the path is correct and click **Finish**. (WP_4.png|description=Figure WP-4: Select the Target Platform)
11. Check the box beside the newly added path and click **Apply**.

Deployment to Installed Polarion

You can deploy a plugin to Polarion in two ways. First you can export a project as **Deployable Plugins and Fragments**. The second way is described in the following section *Execution from Workspace*. To export the plug-in, perform these steps:

1. Select **File > Export...**
2. In the dialog that appears, select **Deployable Plugins and Fragments** in **Plug-in Development** section and click the **Next** button.
3. Mark your project (e.g. for **Servlet** example it will be `com.polarion.example.servlet`), and as the destination directory specify the polarion folder of your Polarion installation directory (usually in `C:\Polarion\polarion`)
4. At the **Options** card be sure, that **Package plug-ins as individual JAR archives** is unchecked. Click **Finish**.
5. Because this is a new polarion plug-in extension, you have to restart your Polarion server.

NOTE: Servlets loaded by Polarion are cached in: `[Polarion_Home]\data\workspace\.config`. If this folder is not deleted before deploying a servlet extension (plugin) and restarting Polarion, then either the servlets will not be properly loaded, or the old ones will be loaded.

Execution from Workspace

The second way to deploy the plug-in to Polarion is to launch Polarion directly from your Eclipse workspace. This method has the added advantage of debugging the code directly in Eclipse.

1. Select **Run > Open Debug Configurations...**
2. Create a new Eclipse application (double click on *Eclipse Application*)
3. You should set:

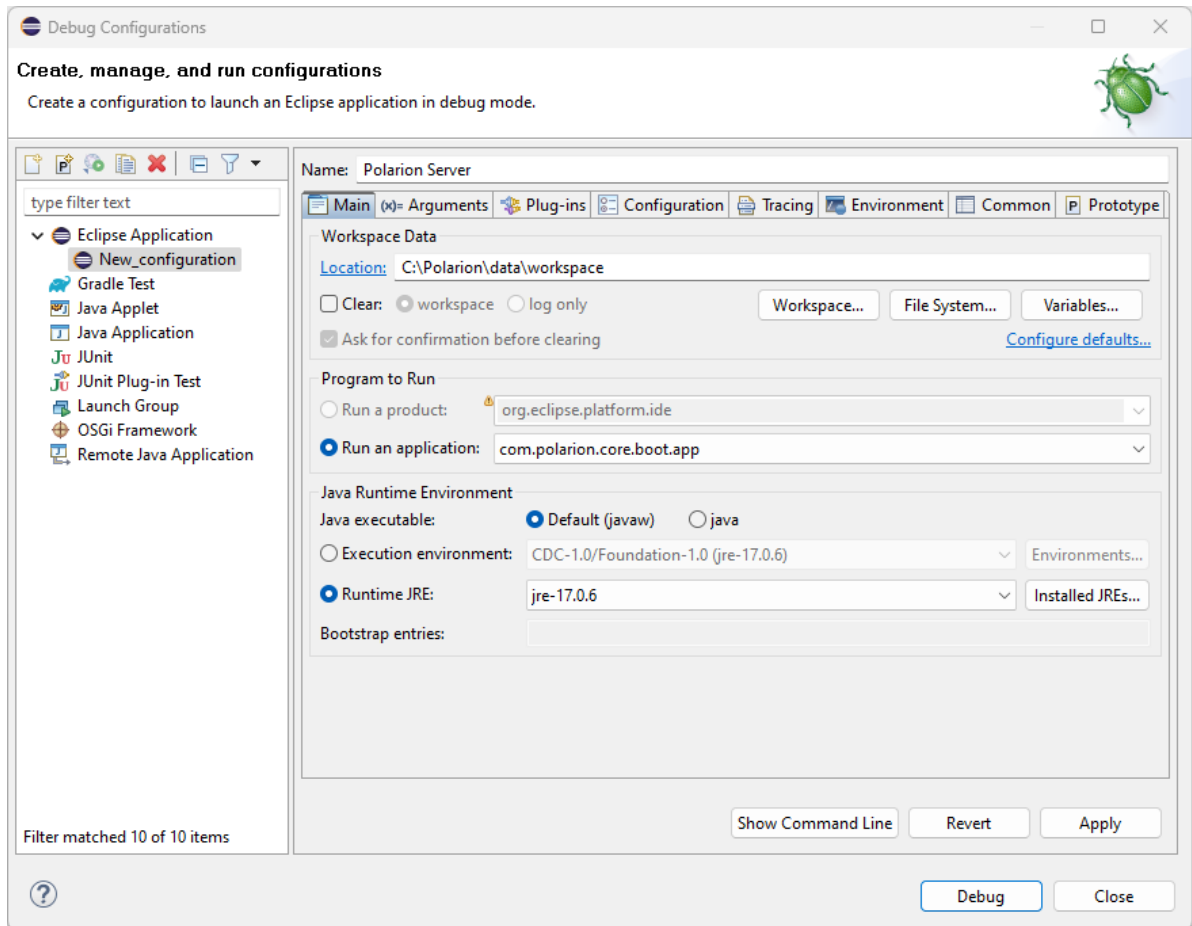


Figure EXEC-1: Debug - Main page

- **Name** to Polarion Server
- **Workspace Data Location** to C:\Polarion\data\workspace (assuming that your Polarion is installed in C:\Polarion\).
- **Run an application** to com.polarion.core.boot.app in the **Program to Run** section.

4. Finally set your Runtime JRE. On the second, "**Arguments**" tab, set the following arguments:

In the **Program Arguments** section:

Windows:

```
--os win32 -ws win32 -arch x86 -appId polarion.server
```

Linux:

```
--os linux -ws gtk -arch x86_64 -appId polarion.server
```

In the **VM Arguments** section:

Windows:

```
--Xms1g -Xmx1g
-Dcom.polarion.home=C:\Polarion\polarion
-XX:+UseBiasedLocking -XX:BiasedLockingStartupDelay=0
--add-opens=java.base/java.io=ALL-UNNAMED --add-opens=java.base/java.lang=ALL-UNNAMED --add-opens=java.base/java.lang.annotation=ALL-UNNAMED
--add-opens=java.base/java.lang.invoke=ALL-UNNAMED --add-opens=java.base/java.lang.module=ALL-UNNAMED --add-opens=java.base/java.lang.ref=ALL-UNNAMED
--add-opens=java.base/java.lang.reflect=ALL-UNNAMED --add-opens=java.base/java.math=ALL-UNNAMED --add-opens=java.base/java.net=ALL-UNNAMED
--add-opens=java.base/java.net.spi=ALL-UNNAMED --add-opens=java.base/java.nio=ALL-UNNAMED --add-opens=java.base/java.nio.channels=ALL-UNNAMED
--add-opens=java.base/java.nio.channels.spi=ALL-UNNAMED --add-opens=java.base/java.nio.charset=ALL-UNNAMED --add-opens=java.base/java.nio.charset.spi=ALL-UNNAMED
--add-opens=java.base/java.nio.file=ALL-UNNAMED --add-opens=java.base/java.nio.file.attribute=ALL-UNNAMED --add-opens=java.base/java.nio.file.spi=ALL-UNNAMED
--add-opens=java.base/java.security=ALL-UNNAMED --add-opens=java.base/java.security.cert=ALL-UNNAMED --add-opens=java.base/java.security.interfaces=ALL-UNNAMED
--add-opens=java.base/java.security.spec=ALL-UNNAMED --add-opens=java.base/java.text=ALL-UNNAMED --add-opens=java.base/java.text.spi=ALL-UNNAMED
--add-opens=java.base/java.time=ALL-UNNAMED --add-opens=java.base/java.time.chrono=ALL-UNNAMED --add-opens=java.base/java.time.format=ALL-UNNAMED
--add-opens=java.base/java.time.temporal=ALL-UNNAMED --add-opens=java.base/java.time.zone=ALL-UNNAMED --add-opens=java.base/java.util=ALL-UNNAMED
```

```
--add-opens=java.base/java.util.concurrent=ALL-UNNAMED --add-opens=java.base/java.util.concurrent.atomic=ALL-UNNAMED --add-
opens=java.base/java.util.concurrent.locks=ALL-UNNAMED
--add-opens=java.base/java.util.function=ALL-UNNAMED --add-opens=java.base/java.util.jar=ALL-UNNAMED --add-
opens=java.base/java.util.regex=ALL-UNNAMED
--add-opens=java.base/java.util.spi=ALL-UNNAMED --add-opens=java.base/java.util.stream=ALL-UNNAMED --add-
opens=java.base/java.util.zip=ALL-UNNAMED
--add-opens=java.base/sun.nio.fs=ALL-UNNAMED --add-opens=java.base/sun.security.ssl=ALL-UNNAMED --add-
opens=java.datatransfer/java.awt.datatransfer=ALL-UNNAMED
--add-opens=java.desktop/java.applet=ALL-UNNAMED --add-opens=java.desktop/java.awt=ALL-UNNAMED --add-
opens=java.desktop/java.awt.color=ALL-UNNAMED
--add-opens=java.desktop/java.awt.desktop=ALL-UNNAMED --add-opens=java.desktop/java.awt.dnd=ALL-UNNAMED --add-
opens=java.desktop/java.awt.dnd.peer=ALL-UNNAMED
--add-opens=java.desktop/java.awt.event=ALL-UNNAMED --add-opens=java.desktop/java.awt.font=ALL-UNNAMED --add-
opens=java.desktop/java.awt.geom=ALL-UNNAMED
--add-opens=java.desktop/java.awt.im=ALL-UNNAMED --add-opens=java.desktop/java.awt.im.spi=ALL-UNNAMED --add-
opens=java.desktop/java.awt.image=ALL-UNNAMED
--add-opens=java.desktop/java.awt.image.renderable=ALL-UNNAMED --add-opens=java.desktop/java.awt.peer=ALL-UNNAMED --add-
opens=java.desktop/java.awt.print=ALL-UNNAMED
--add-opens=java.desktop/java.beans=ALL-UNNAMED --add-opens=java.desktop/java.beans.beancontext=ALL-UNNAMED --add-
opens=java.desktop/javax.swing=ALL-UNNAMED
--add-opens=java.desktop/javax.swing.border=ALL-UNNAMED --add-opens=java.desktop/javax.swing.text=ALL-UNNAMED --add-
opens=java.desktop/javax.swing.text.html=ALL-UNNAMED
--add-opens=java.desktop/sun.awt=ALL-UNNAMED --add-opens=java.desktop/sun.font=ALL-UNNAMED --add-opens=java.desktop/sun.java2d=ALL-
UNNAMED
--add-opens=java.instrument/java.lang.instrument=ALL-UNNAMED --add-opens=java.logging/java.util.logging=ALL-UNNAMED --add-
opens=java.management/java.lang.management=ALL-UNNAMED
--add-opens=java.prefs/java.util.prefs=ALL-UNNAMED --add-opens=java.rmi/java.rmi=ALL-UNNAMED --add-opens=java.rmi/java.rmi.dgc=ALL-
UNNAMED
--add-opens=java.rmi/java.rmi.registry=ALL-UNNAMED --add-opens=java.rmi/java.rmi.server=ALL-UNNAMED --add-opens=java.sql/java.sql=ALL-
UNNAMED
--add-opens=java.xml/com.sun.org.apache.xerces.internal.dom=ALL-UNNAMED --add-
opens=java.xml/com.sun.org.apache.xerces.internal.jaxp=ALL-UNNAMED
--add-opens=java.xml/com.sun.org.apache.xerces.internal.parsers=ALL-UNNAMED --add-
opens=java.xml/com.sun.org.apache.xerces.internal.util=ALL-UNNAMED
```

Linux

```
--Xms1g -Xmx1g
-Dcom.polarion.home=/opt/polarion/polarion -Dcom.polarion.propertyFile=/opt/polarion/etc/polarion.properties
-XX:+UseBiasedLocking -XX:BiasedLockingStartupDelay=0
--add-opens=java.base/java.io=ALL-UNNAMED --add-opens=java.base/java.lang=ALL-UNNAMED --add-opens=java.base/java.lang.annotation=ALL-
UNNAMED
--add-opens=java.base/java.lang.invoke=ALL-UNNAMED --add-opens=java.base/java.lang.module=ALL-UNNAMED --add-
opens=java.base/java.lang.ref=ALL-UNNAMED
--add-opens=java.base/java.lang.reflect=ALL-UNNAMED --add-opens=java.base/java.math=ALL-UNNAMED --add-opens=java.base/java.net=ALL-
UNNAMED
--add-opens=java.base/java.net.spi=ALL-UNNAMED --add-opens=java.base/java.nio=ALL-UNNAMED --add-opens=java.base/java.nio.channels=ALL-
UNNAMED
--add-opens=java.base/java.nio.channels.spi=ALL-UNNAMED --add-opens=java.base/java.nio.charset=ALL-UNNAMED --add-
opens=java.base/java.nio.charset.spi=ALL-UNNAMED
--add-opens=java.base/java.nio.file=ALL-UNNAMED --add-opens=java.base/java.nio.file.attribute=ALL-UNNAMED --add-
opens=java.base/java.nio.file.spi=ALL-UNNAMED
--add-opens=java.base/java.security=ALL-UNNAMED --add-opens=java.base/java.security.cert=ALL-UNNAMED --add-
opens=java.base/java.security.interfaces=ALL-UNNAMED
--add-opens=java.base/java.security.spec=ALL-UNNAMED --add-opens=java.base/java.text=ALL-UNNAMED --add-
opens=java.base/java.text.spi=ALL-UNNAMED
--add-opens=java.base/java.time=ALL-UNNAMED --add-opens=java.base/java.time.chrono=ALL-UNNAMED --add-
opens=java.base/java.time.format=ALL-UNNAMED
--add-opens=java.base/java.time.temporal=ALL-UNNAMED --add-opens=java.base/java.time.zone=ALL-UNNAMED --add-
opens=java.base/java.util=ALL-UNNAMED
--add-opens=java.base/java.util.concurrent=ALL-UNNAMED --add-opens=java.base/java.util.concurrent.atomic=ALL-UNNAMED --add-
opens=java.base/java.util.concurrent.locks=ALL-UNNAMED
--add-opens=java.base/java.util.function=ALL-UNNAMED --add-opens=java.base/java.util.jar=ALL-UNNAMED --add-
opens=java.base/java.util.regex=ALL-UNNAMED
--add-opens=java.base/java.util.spi=ALL-UNNAMED --add-opens=java.base/java.util.stream=ALL-UNNAMED --add-
opens=java.base/java.util.zip=ALL-UNNAMED
--add-opens=java.base/sun.nio.fs=ALL-UNNAMED --add-opens=java.base/sun.security.ssl=ALL-UNNAMED --add-
opens=java.datatransfer/java.awt.datatransfer=ALL-UNNAMED
--add-opens=java.desktop/java.applet=ALL-UNNAMED --add-opens=java.desktop/java.awt=ALL-UNNAMED --add-
opens=java.desktop/java.awt.color=ALL-UNNAMED
--add-opens=java.desktop/java.awt.desktop=ALL-UNNAMED --add-opens=java.desktop/java.awt.dnd=ALL-UNNAMED --add-
opens=java.desktop/java.awt.dnd.peer=ALL-UNNAMED
--add-opens=java.desktop/java.awt.event=ALL-UNNAMED --add-opens=java.desktop/java.awt.font=ALL-UNNAMED --add-
opens=java.desktop/java.awt.geom=ALL-UNNAMED
--add-opens=java.desktop/java.awt.im=ALL-UNNAMED --add-opens=java.desktop/java.awt.im.spi=ALL-UNNAMED --add-
opens=java.desktop/java.awt.image=ALL-UNNAMED
--add-opens=java.desktop/java.awt.image.renderable=ALL-UNNAMED --add-opens=java.desktop/java.awt.peer=ALL-UNNAMED --add-
opens=java.desktop/java.awt.print=ALL-UNNAMED
--add-opens=java.desktop/java.beans=ALL-UNNAMED --add-opens=java.desktop/java.beans.beancontext=ALL-UNNAMED --add-
opens=java.desktop/javax.swing=ALL-UNNAMED
--add-opens=java.desktop/javax.swing.border=ALL-UNNAMED --add-opens=java.desktop/javax.swing.text=ALL-UNNAMED --add-
opens=java.desktop/javax.swing.text.html=ALL-UNNAMED
--add-opens=java.desktop/sun.awt=ALL-UNNAMED --add-opens=java.desktop/sun.font=ALL-UNNAMED --add-opens=java.desktop/sun.java2d=ALL-
UNNAMED
--add-opens=java.instrument/java.lang.instrument=ALL-UNNAMED --add-opens=java.logging/java.util.logging=ALL-UNNAMED --add-
opens=java.management/java.lang.management=ALL-UNNAMED
--add-opens=java.prefs/java.util.prefs=ALL-UNNAMED --add-opens=java.rmi/java.rmi=ALL-UNNAMED --add-opens=java.rmi/java.rmi.dgc=ALL-
UNNAMED
--add-opens=java.rmi/java.rmi.registry=ALL-UNNAMED --add-opens=java.rmi/java.rmi.server=ALL-UNNAMED --add-opens=java.sql/java.sql=ALL-
UNNAMED
--add-opens=java.xml/com.sun.org.apache.xerces.internal.dom=ALL-UNNAMED --add-
opens=java.xml/com.sun.org.apache.xerces.internal.jaxp=ALL-UNNAMED
--add-opens=java.xml/com.sun.org.apache.xerces.internal.parsers=ALL-UNNAMED --add-
opens=java.xml/com.sun.org.apache.xerces.internal.util=ALL-UNNAMED
```

5. You must now change the parameters to the Polarion server based on your installation. You can check the settings with the following screenshot:

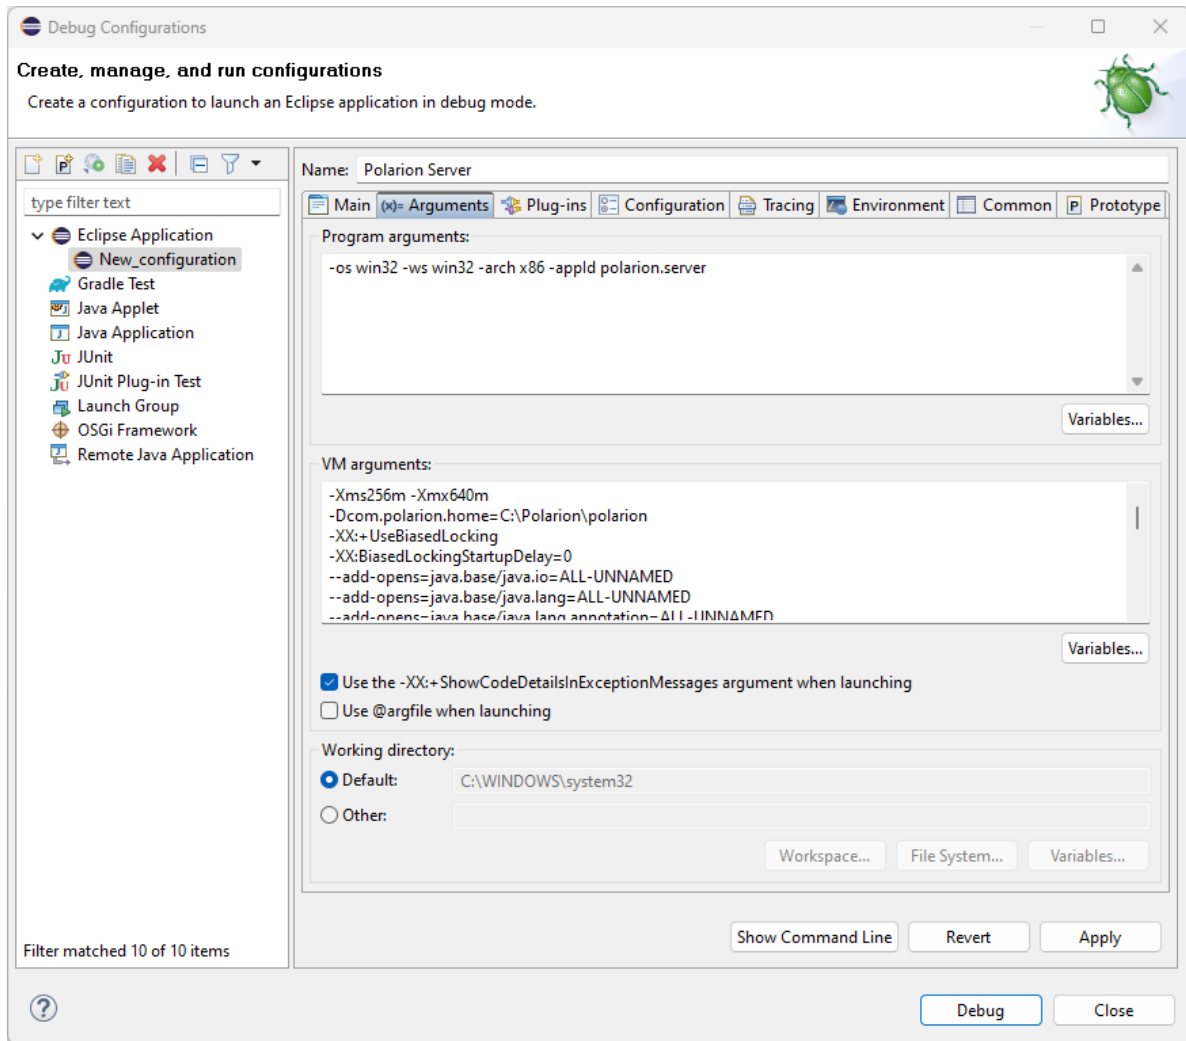


Figure EXEC-2: Debug - Arguments page

6. On the third "**Plug-ins**" tab, make sure, you have also selected "**Target Platform**" plugins.
7. Select all, and then click the **Validate Plug-ins** button. If there are some problems, uncheck the plugins which are in conflict.

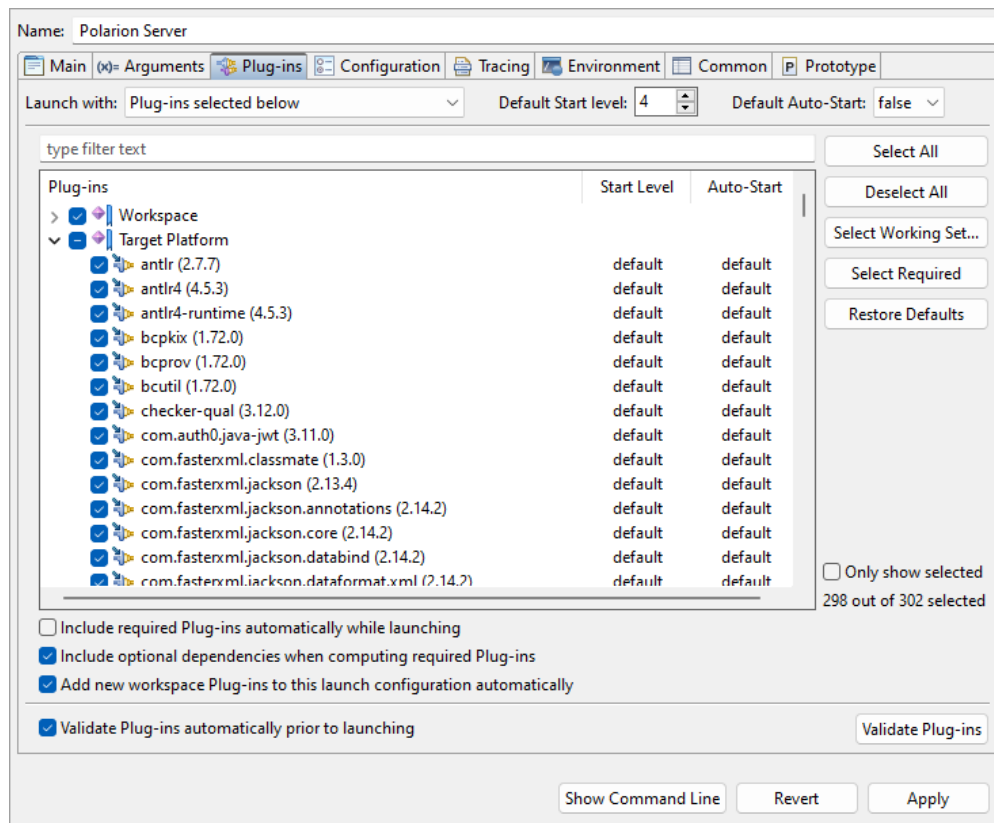


Figure EXEC-3: Debug - Plug-ins page

8. Other pages shouldn't be changed. Just click the **Debug** button, and go on with your new Polarion Server application.